

Mini-Trol® Water Hammer Arrestor




SPECIFICATIONS

Model No.	Connection Size	Dimensions	
		Height	Diameter
500	1/2" NPT	4-1/2"	3-3/8"

Air Cushion Volume – 10 cubic inches
 Precharge – 22 PSI
 Shell Material – Deep Drawn Steel
 Liner Material – Polypropylene
 Diaphragm Material – Butyl Rubber
 Maximum Working Pressure – 150 PSI
 Maximum Working Temperature – 200° F
 Maximum Shock Pressure – 200 PSI

Diatrol® Shock Suppressor

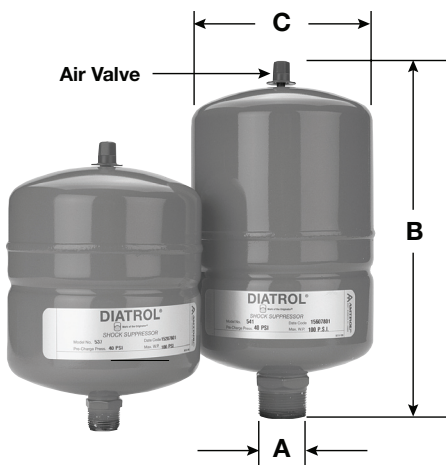

SPECIFICATIONS

Model No.	P.D.I. Symbol	Volume		Rated GPM	Dimensions			Volume Cu. Ft.	Total Fixture Units
		Gallons	Liters		A (NPT)	B	C		
537	A, B	.75	2,9	16.6	3/4"	9-1/8"	6-1/8"	.100	12 - 32
541	F	1.00	3,785	104.6	1"	11-7/8"	6-1/8"	.134	155 - 330

Shell Material – Steel
 Liner – Polypropylene
 Diaphragm – Heavy Duty Butyl
 Connector - Stainless Steel
 Maximum Working Temperature – 200°F
 Maximum Working Pressure – 100 PSI
 Maximum Shock Pressure – 150 PSI
 Precharge – 40 PSI



Polypropylene liner listed by the
National Sanitation Foundation

Certified as meeting Plumbing and Drainage Institute (P.D.I.)
Standard P.D.I. WH-201 for Water Hammer Arresters.